




Samsung TL220 AF Assist Lamp Replacement

This guide will show the user how to properly disassemble the Samsung TL220 camera to replace the interior light bulb.

Written By: chelsa


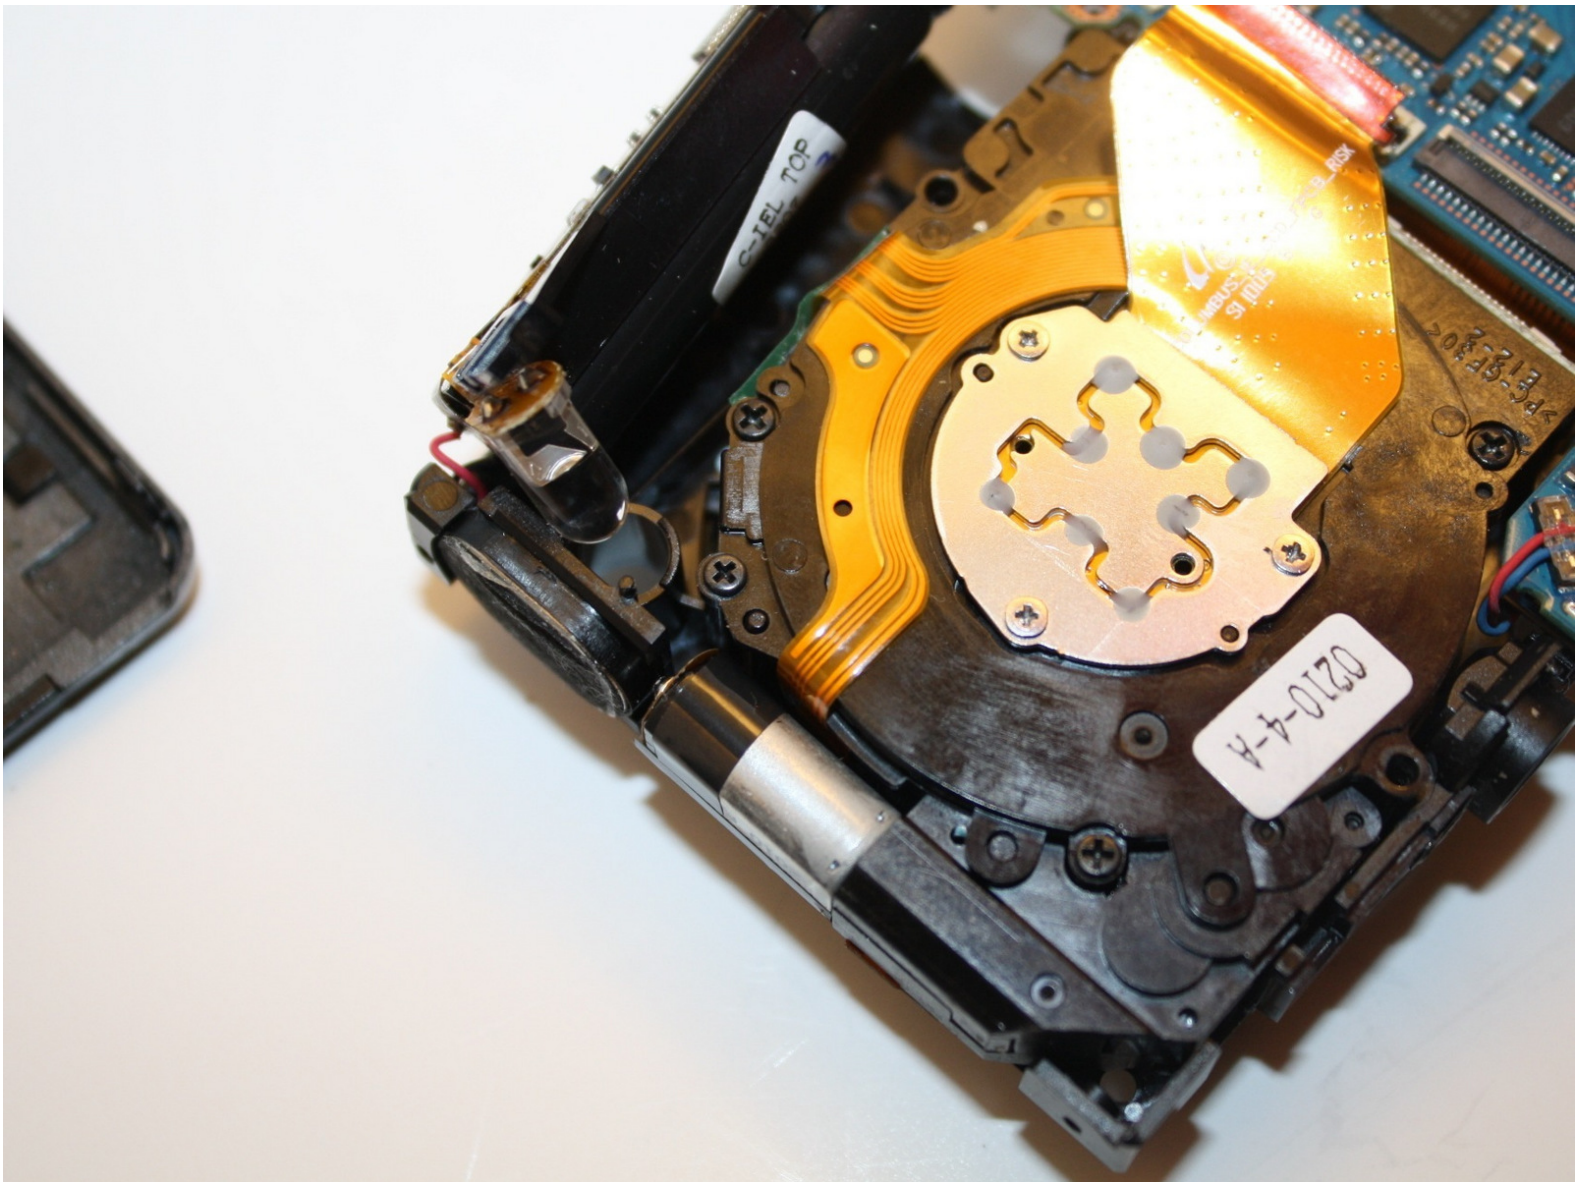


Step 1 — Light Bulb





- Begin with unscrewing the seven outside shell 4 mm Philip screws with the Philips screw driver.
- Now carefully pry open the back casing with the ifixit plastic opening tool.

Step 2

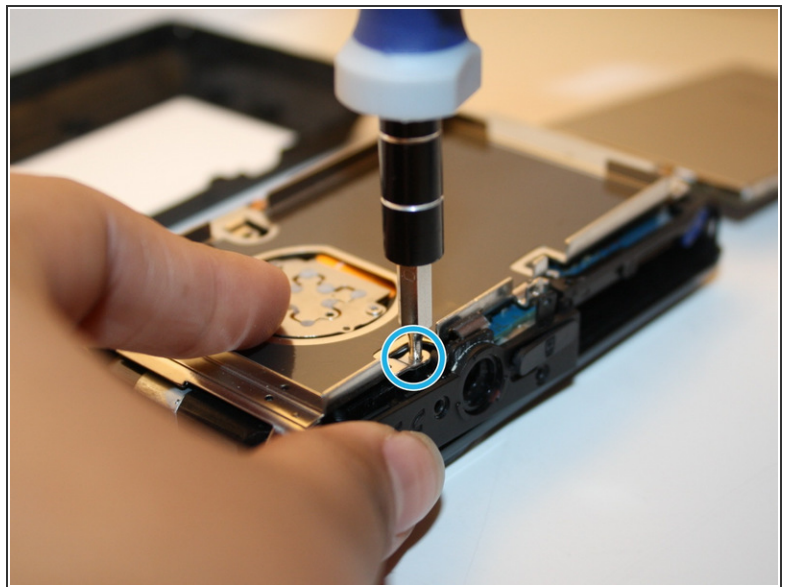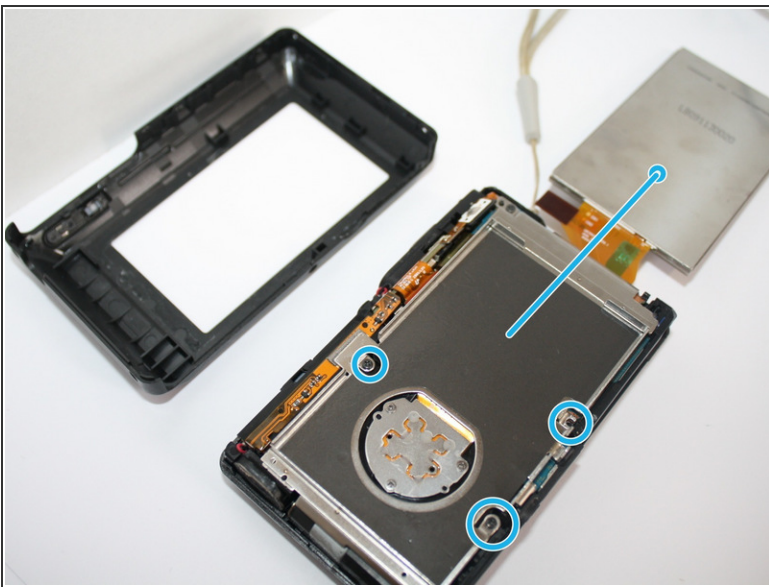


- Now that you have the back casing off, gently remove the LCD screen up and to lay on top of the table to the right.
- Next unscrew with the same screw driver, the 4 mm Philip screws on the back panel.

Step 3

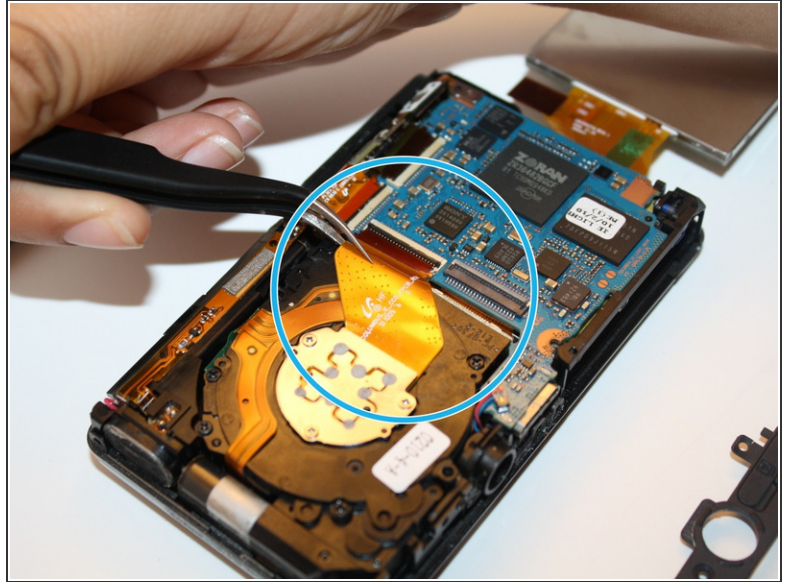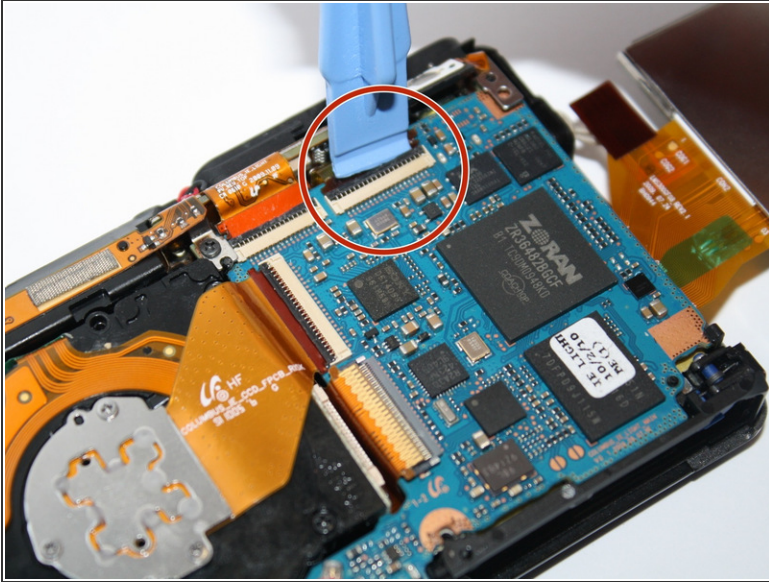


- Unclip the four connectors that hold down the orange copper film strips with the plastic opening tool.
- Then carefully pull out the three film strips with the ifixit tweezers.

Step 4

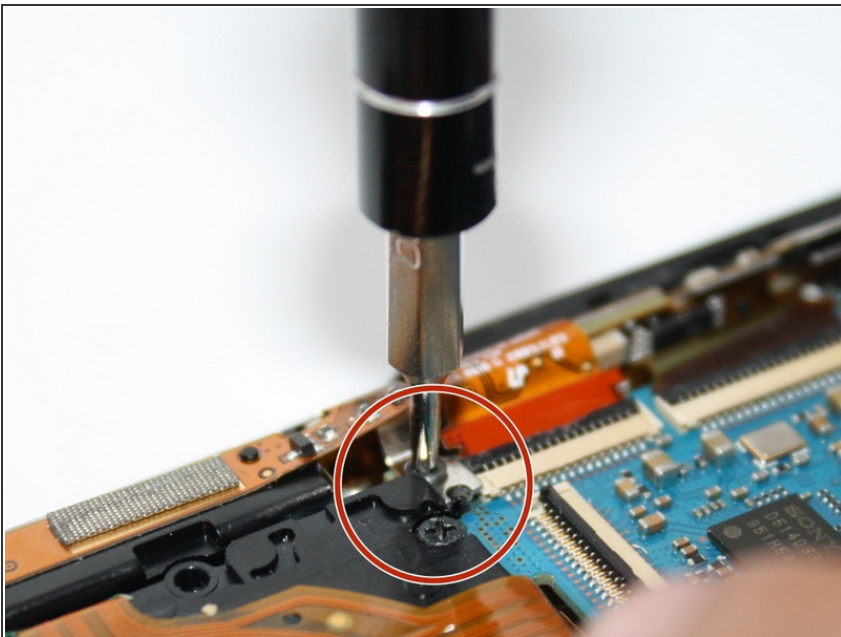


- Remove the 4 mm Philip screws located above the center film strip with the Philip screw driver. This will allow the top frame to come loose to take off.

Step 5

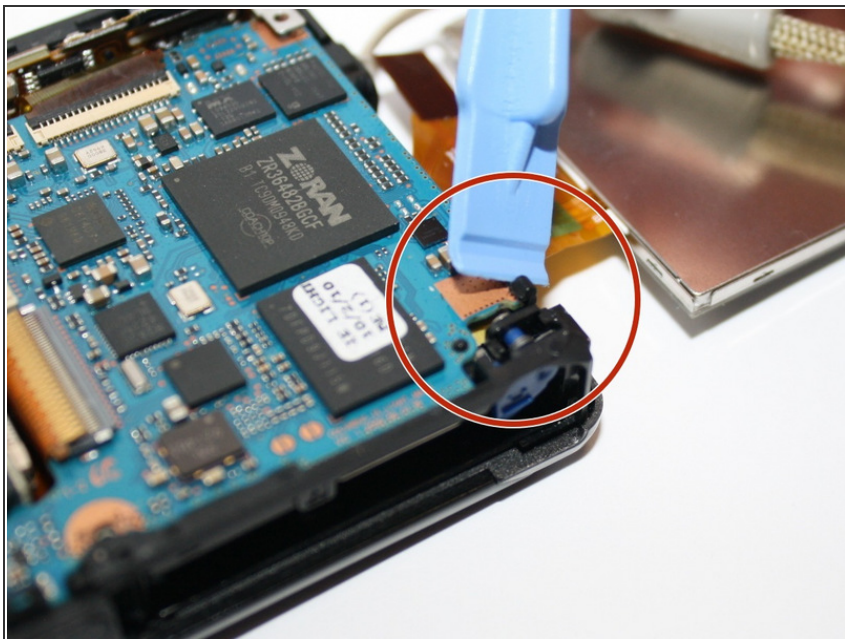


- Then pull the black claw located at the bottom right of the camera, to the right with the plastic opening tool. This holds the main plate down.

Step 6

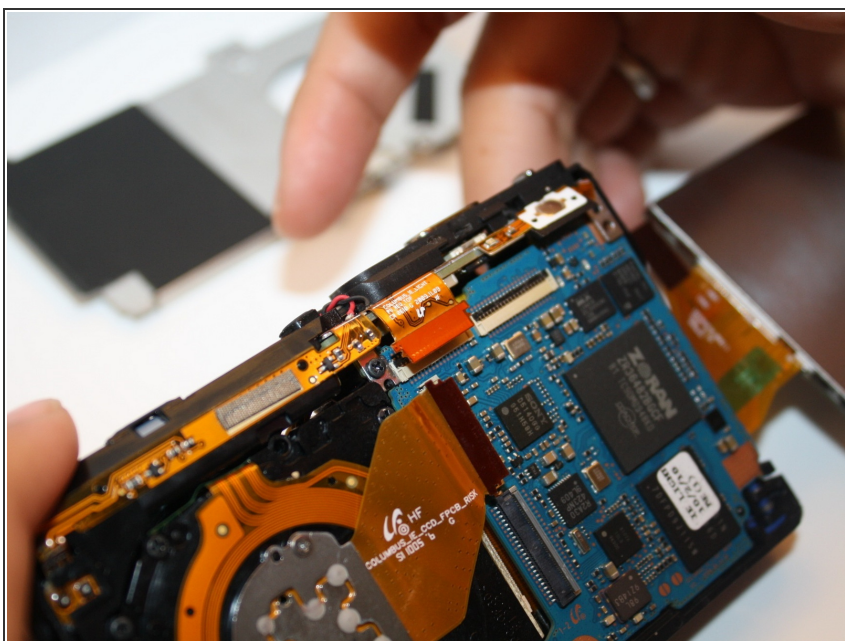

- Slowly lift with your fingers, the top frame of the camera up, disconnecting it from the main piece.

Step 7

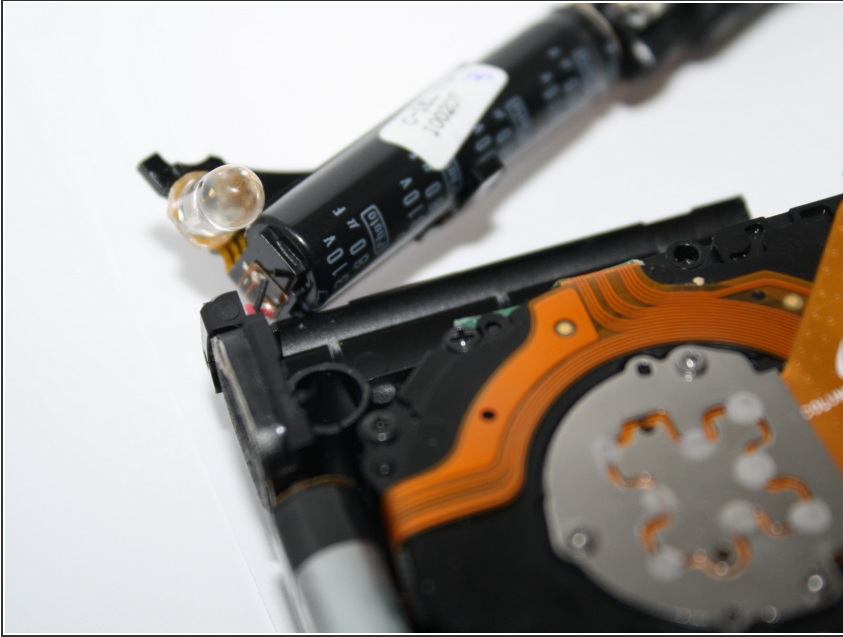

- This piece disconnected exposes the light bulb that you can change out at this point in the guide.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-18 09:05:55 AM.